

# HIAB X-HIPRO 302






# HIAB X-HIPRO 302 BASIC DATA

| BASIC DATA                                               | X-HiPro 302 E-6 | X-HiPro 302 E-6<br>Jib 45X-3 | X-HiPro 302 E-8 | X-HiPro 302<br>EP-5 |
|----------------------------------------------------------|-----------------|------------------------------|-----------------|---------------------|
| Mdyn                                                     | 325 kNm         | 325 kNm                      | 325 kNm         | 325 kNm             |
| Lifting capacity (kNm)                                   | 229             | 229                          | 219             | 238                 |
| Lifting capacity (tm)                                    | 23,3            | 23,3                         | 22,3            | 24,3                |
| Lifting capacity (ADC) (kNm)                             | 245             | 245                          | 236             | 255                 |
| Lifting capacity (ADC) (tm)                              | 25              | 25                           | 24,1            | 26                  |
| Outreach - lifting capacity, standard (m-kg)             | 2,6 - 9 400     | 19,2 - 540                   | 2,5 - 9 200     | 2,6 - 9 700         |
|                                                          | 4,5 - 5 500     | 20,8 - 480                   | 4,7 - 5 100     | 4,5 - 5 800         |
|                                                          | 6,1 - 3 900     | 22,7 - 430                   | 6,3 - 3 550     | 6,2 - 4 050         |
|                                                          | 7,9 - 2 840     | 24,6 - 390                   | 8,1 - 2 540     | 8,2 - 2 940         |
|                                                          | 9,8 - 2 180     |                              | 10 - 1 880      | 10,4 - 2 240        |
|                                                          | 11,8 - 1 740    |                              | 12 - 1 460      | 12,7 - 1 800        |
|                                                          | 13,9 - 1 420    |                              | 14,1 - 1 160    | 15 - 1 520          |
|                                                          | 16,1 - 1 220    |                              | 16,3 - 940      |                     |
|                                                          |                 |                              | 18,6 - 800      |                     |
|                                                          |                 |                              | 20,9 - 700      |                     |
| Outreach - lifting capacity, manual extensions (m-kg)    | 18,3 - 980      |                              | 22,4 - 600      | 17,2 - 1 260        |
| Hydraulic outreach, standard (m)                         | 16,2            | 24,7                         | 21              | 15,1                |
| Hydraulic boom extension (m)                             | 11,7 m          | 17,1 m                       | 16,3 m          | 10,6 m              |
| Outreach, manual extensions (m)                          | 18,4            | 0                            | 22,6            | 17,3                |
| Lifting height above installation level, hydr/man. (m)   | 18,8 / 23,1     | 27,2 / 0,0                   | 23,6 / 25,1     | 17,7 / 19,8         |
| Rec. oil flow (l/min)                                    | 90 - 120        | 90 - 120                     | 90 - 120        | 90 - 120            |
| Working pressure (Mpa)                                   | 33,5            | 33,5                         | 33,5            | 33,5                |
| Oil in tank (l)                                          | 150 - 200       | 150 - 200                    | 150 - 200       | 150 - 200           |
| Tank capacity (l)                                        | 0 - 235         | 0 - 235                      | 0 - 235         | 0 - 235             |
| Slewing angle (°)                                        | 420             | 420                          | 420             | 420                 |
| Max slope viable at full capacity (°)                    | 5               | 5                            | 5               | 5                   |
| Slewing torque, gross (kNm)                              | 34              | 34                           | 34              | 34                  |
| Slewing speed (80°/s)                                    | 15              | 15                           | 15              | 15                  |
| Slewing speed( °/s)                                      | 15              | 15                           | 15              | 15                  |
| Lifting speed at standard hydraulic outreach (m/s)       | 2,1             | 2,1                          | 2,7             | 1,9                 |
| Height in folded position (mm)                           | 2 650           | 2 633                        | 2 401           | 2 650               |
| Width in folded position (mm)                            | 2 505           | 2 505                        | 2 508           | 2 503               |
| Install space required. Rotation area not included (mm)  | 1 256           | 1 215                        | 1 212           | 1 274               |
| Install space required with hose and pipe kit (mm)       | 1 256           | 1 215                        | 1 212           | 1 274               |
| Crane in standard version without stabiliser system (kg) | 3 480           | 4 020                        | 3 750           | 3 210               |
| Frame attachments (kg)                                   | 56 - 63         | 56 - 63                      | 56 - 63         | 56 - 63             |
| Stabiliser system (kg)                                   | 381 - 465       | 381 - 465                    | 381 - 465       | 381 - 465           |

This table show one example of a model, and represents some of all options available. With the opportunity to configure your crane, we can provide you with a crane perfectly tailored for your needs.

Please contact your local dealer for more information and the exact data on the variety of options we can offer.

Hiab X-HIPRO 302 EP-5

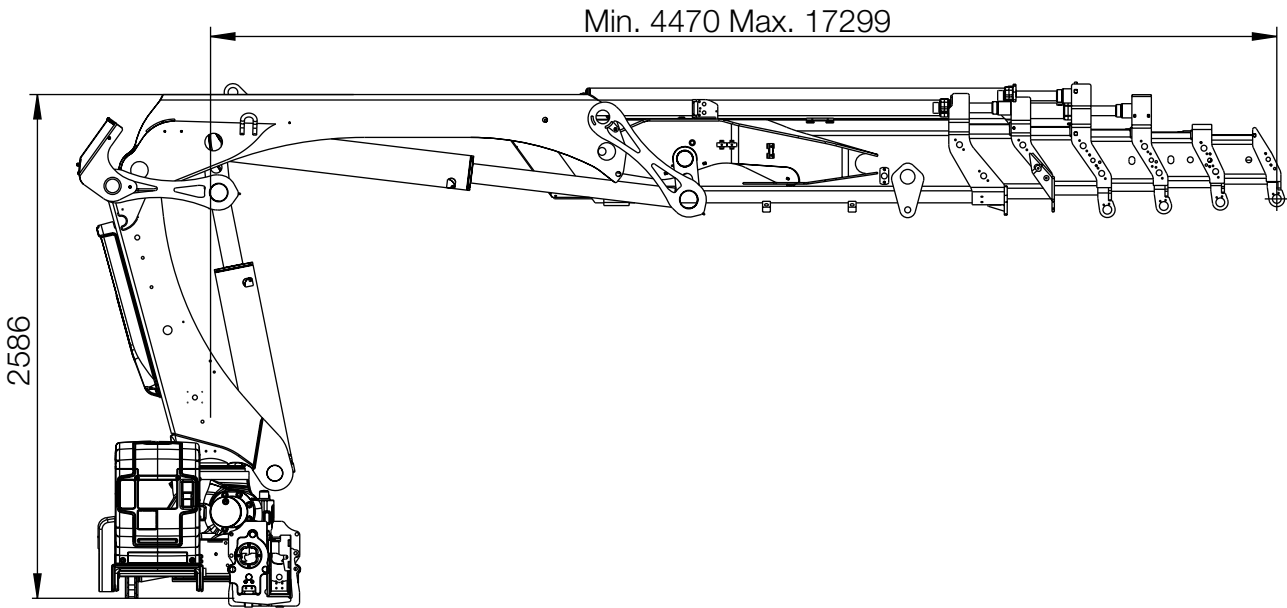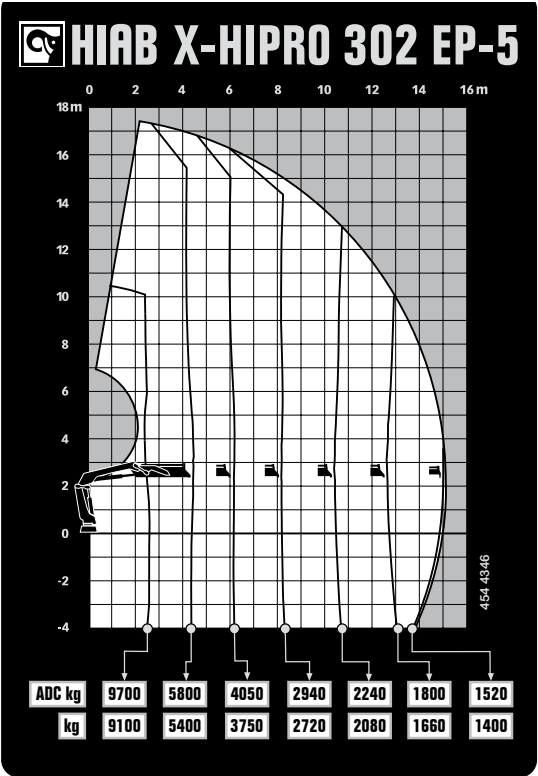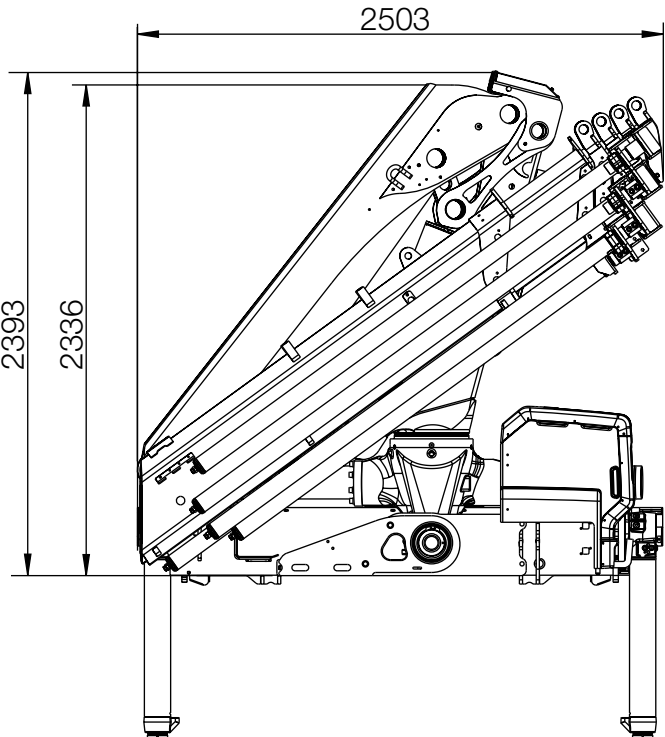

# BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

[hiab.com](http://hiab.com)

Hiab is part of Cargotec.

[cargotec.com](http://cargotec.com)



© BD-XIIPRO302-EN-VW\_160906



[hiab.com](http://hiab.com)